

IQM-GBA - Alliance-mx Dome Electrical Gang Box Adapter

Installation Instructions

1 Service

If the unit needs repair service or parts, the customer should contact IQinVision for a Return Merchandise Authorization (RMA), as well as shipping instructions.

IQinVision
33122 Valle Road
San Juan Capistrano, CA 92675-4853
Phone: +1-949-369-8100 or 1-877-850-0805 (toll-free in U.S.)
Fax: +1-949-369-8105

2 Unpacking

The Alliance-mx Electrical Gang Box Adapter assembly should include the following:

1. Electrical Gang Box Adapter
2. Pack of (8) machine screws
 - (4) #6 x 1" Phillips Pan Head machine screws
 - (4) M4 x 12mm Phillips Pan Head machine screws

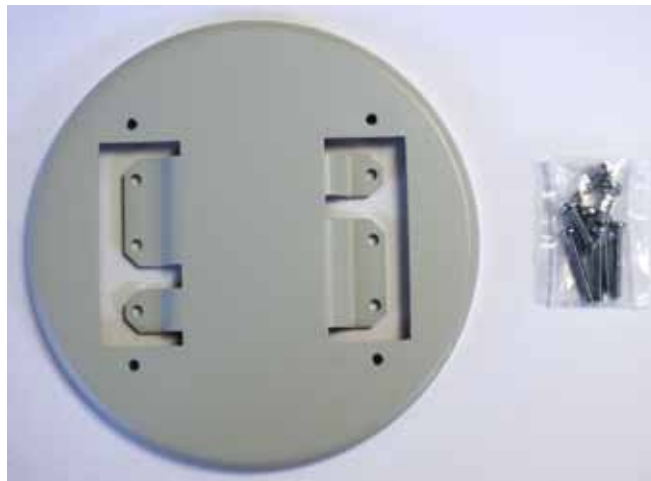


FIGURE 1

3 Installation

1. Route the Ethernet cable through the opening in the Electrical Gang Box Adapter, and attach the adapter as shown in Figure 2 using the four supplied #6 x 1" machine screws.

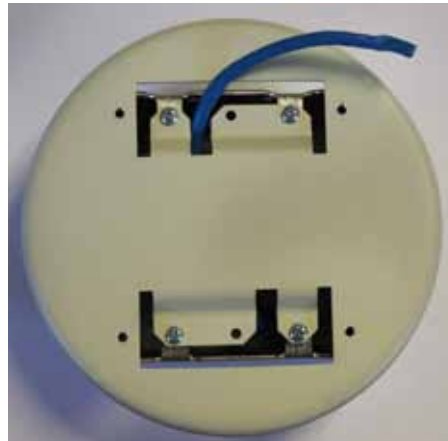


FIGURE 2

2. Route the Ethernet cable through the gasket installed in the enclosure. Attach the Alliance-mx series camera to the adapter as shown Figure 3 using the four M4 x 12mm machine screws and sealing washers supplied with the Alliance-mx dome camera.



FIGURE 3

3. After the field-of-view and focus are completed, attach the dome trim ring cover with shroud to the enclosure by tightening the three tamper-proof screws with the Torx T-20 security wrench supplied with the Alliance-mx camera.



FIGURE 4